

C.L-CNC-400

CNC双头400精雕机-三轴、四轴

CNC 400 Milling machine—double spindle 3 Axis / 4 Axis

双头、双Z轴、双变频

Double head, double Z axis and double frequency conversion

功能

非金属图案雕刻，软金属的小产品加工,TR专用机,即可双工位同时加工，也可双工序加工，每个机头可独立运行。

Functions


Non-metallic pattern carving, soft metal product processing, TR special machine, dole-station It can realize the simultaneous processing and double processing, and each machine head can realize the independent operation.

优点

- 可换不同的夹具，雕刻不同类型的产品
- 可同时雕铣两个同类工件，也可独立雕铣
- 灵活方便，实用性强
- 光洁度好，精度高

Advantages

- It can change the different fixtures and engrave the different types of product.
- It can realize the engraving and milling of two similar workpieces and the independent engraving and milling.
- It is flexible and convenient and has strong practicality.
- The finish is good, and the precision is high.

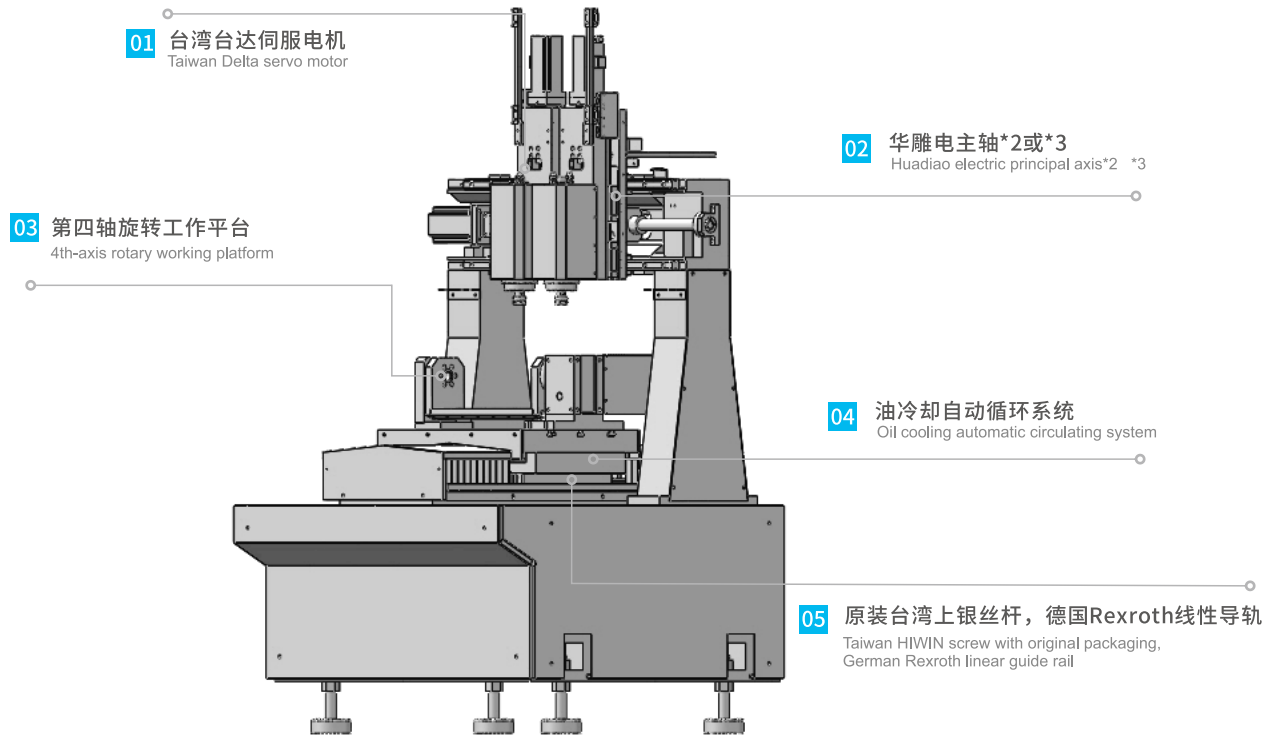

技术参数 / Technical Parameters

性能指标项 Performance index	标准值 standard value	刀具规格 Shank mode	ER16
X、Y、Z轴运动定位精度 Positional accuracy of X/Y/Z axes movement	0.015mm	快速移动速度 Rapid feed rate	20m/min
X、Y、Z轴重复定位精度 The accuracy of repetitive positioning of X/Y/Z/A axes	0.010mm	工作电压 Working voltage	220V/50HZ
X、Y、Z轴工作行程 Operating stroke of X/Y/Z axes	400mm*300mm*200mm	驱动系统 Driving system	交流伺服 SYNTEC system +hand box
A轴夹具第四轴精度 A-shaft clamp fourth-axis precision	0.015mm	操作系统 Operating system	新代系统+手执盒 SYNTEC system +hand box
工作台尺寸 Table size	450mm*380mm	气源压力 Air pressure	0.6MPA
主轴功率 Pindle power	1.5KW*2/1.5KW*3	床体重量(KG) Machine tool weight(KG)	1550KG
主轴转速 Spindle speed	3000-24000RMP/ 3000-60000RMP	机床尺寸 Machine dimension	1200*1350*1850 1150*1450*2000